


Code	
P935070 00002	IGEA BT
R935297 00002	KIT IGEA BT FRA THALIA
R935229 00002	KIT IGEA BT FRA

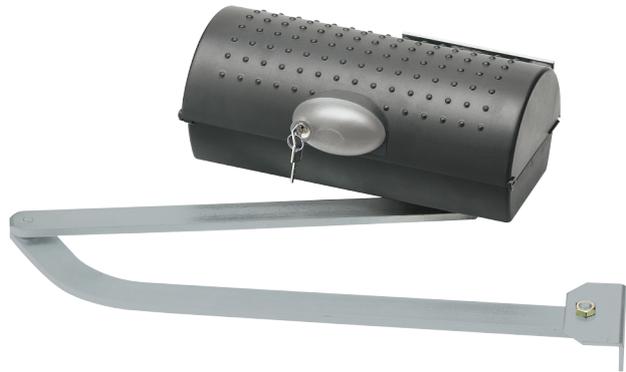

Technical features

	IGEA BT
Control unit	THALIA
Operator weight	16 kg
Operator type	electromechanical swing operators with articulated arm
Power supply	24 V
Power input	40 W
Maximum angle	125 °
Cycle time	15 sec
Type of limit switch	electromechanical
Slowdown	yes
Impact reaction	d-track
Locking	mechanical
Release	knob operated with personal key
Frequency of use	intensive
Environmental conditions	from -15 °C to 60 °C

ACCESSORIES



THALIA - D113745 00002
Control panel for one or two 24V operators for swing gates



THALIA P - D113747 00002
Control panel for one or two 24V operators for swing gates



BIR C - N190104
Rubber safety edge (H 30 mm), price per m



LRV - P135005
Bras court pour IGEA, IGEA BT - LRV




BOX - N574039
Wall-mounted safe for steel cable release and electric control



RADIUS B LTA 24 R1 - D113748 00003
Flashing beacon with built-in antenna for 24V motors Flashing light without incorporated antenna for motors with power supply 24 V.



RADIUS B LTA 24 R2 - D113749 00003
Flashing beacon without built-in antenna for 24V motors Flashing light without incorporated antenna for motors with power supply 24 V.



B 00 R02 - P123025
Wall mounting for B LTA series flashing beacons



Mitto B Rcb02 R1 - D111904
Transmitter with channels. Range . Power supply with 1 battery type 23 A



Q.BO TOUCH - P121024
Wireless digital touch button panel 433Mhz rolling code.



Q.BO KEY WM - P121022
Key selector for outdoor use with double contact.



DESME A15 - P111526
Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc. Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc.

ACCESSORIES



PHP - P903018
Pair of aluminium posts for THEA/DESME photocells



BBT BAT - P125020
Set of backup batteries for THALIA and THALIA P



CMS - D831081
Sign