

IGEA BT UL



RANGE

Electromechanical operator for column mounted swing gates up to 10 feet and 550 lbs

IGEA BT

P935070 00004 IGEA BT UL Operator only
R935229 00010: IGEA BT UL 24V SINGLE KIT
(Includes 1 Operator, Wired Photocell, 2 Mittos, and 6Ft. Cable)
** Doesn't Include Control Board **

R935229 00011: IGEA BT UL 24V DUAL KIT
(Includes 2 Operators, Wired Photocell, 2 Mittos, and 35Ft. Cable)
** Doesn't Include Control Board **

SMART TECHNOLOGY

Control unit compatible with EELink and U-link protocol

SAFE USE

- This version powered at 24V is specially designed for simpler and faster installation in compliance with latest safety standards.
- Thanks to the antisquashing system, the operator reverses motion and prevents damage to people and vehicles in the event of contact.



Thalia UL SE

- 10" x 12" Hinged fiberglass enclosure
- UL 325 alarm with reset



Thalia UL LEB

- Large 12" x 14" Hinged fiberglass enclosure
- Includes: Battery backup with (2) 12V, 9 AH batteries, 115V outlets for accessories
- UL 325 alarm with reset



TECHNICAL FEATURES


Control panel	Thalia UL
Reversible/irreversible operator	irreversible
Power supply	24V
Absorbed power	.5hp (40W)
Thermal protection	integrated in the control panel
Opening or closing time	15 s
Impact reaction	torque limiter integrated in the control panel
Type of lock	mechanical opening/closing
Manual release	release knob with personalised key
Operating cycle	intensive use
Environmental conditions	-4F to 131F
Degree of protection	IP44
Operator weight	35 lbs (~16 kg)
Dimensions	see drawing next page



Be ahead

IGEA BT UL

DIMENSIONS

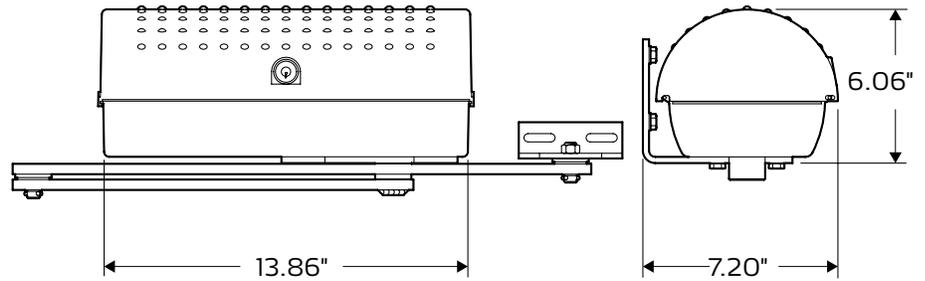

ACCESSORIES



D113745 00001:
THALIA BOARD SD
120V FOR PHOBOS/
KUSTOS/ IGEA




BFT-1200MLKIT -
1200 LB MAGLOCK
KIT
Magnetic lock Kit including
bracket, relay and power
supply.




P111494 B EBA
WIFI GATEWAY
For use with U Control App
for open/ closing BFT gate
systems with smart phone
app or GPS. Wifi connection
access at gate required.



N999629 MITTO 4
RAINBOW
4 X 4 CH Mitto
Transmitters- White,
Blue, Burgundy & Yellow
4 button remote control
433 Mgtz



D111881 00001
THALIA UL
BOARD ONLY



KHLKIT
HOMELINK KIT
HomeLink Compatible receiver
and transmitter for installing
HomeLink with BFT control
boards.



D111904 MITTO 2
TRANSMITTER
12V Two channel 433Mhz
rolling code remote control



P125020
BATTERY BACKUP
FOR THALIA
CONTROL BOARDS
plugs directly into the board



P121024 Q B TOUCH
Digital keypad with
10 channels and 100
combinations. Backlit



KETHALIA32L - ECOSOL KIT
Interface, solar panel and 15' of panel cable interface harness, for running BFT control panels off 24V solar power. Includes two 12V 7.2Ah batteries and circuit board for management of commands to control panel and battery charge management, with built-in Rolling Code 433.92 MHz receiver with 63 stored positions.



I10010710001
JOINT/IGEA
PRIMARY ARM
Grey powder coated arm
connecting to operator.



I10010610001
JOINT/IGEA
SECONDARY ARM
Grey powder coated arm
connecting to the gate
bracket.



D531548 - KI
Blank spare key for
release knob



Be ahead