


Complete range of semi-automatic bollards operated by gas spring. They allow road access control at convenient prices and extremely easy operation. Also available with s/steel shaft and luminous cap.

DIMENSIONS (mm)

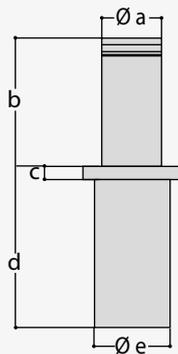

	a	b	c	d	e
DAMPY B 115-500 / DAMPY B 115-500 INOX	115	500	25	593	168
DAMPY B 210-500 / DAMPY B 219-500 INOX	210	500	45	756	273
DAMPY B 210-700 / DAMPY B 219-700 INOX	210	700	45	1016	273

Parking and traffic bollards

Technical features

	DAMPY B 219/500 L	DAMPY B 219/500 L - RAL	DAMPY B 219/500 LI	DAMPY B 219/700 L	DAMPY B 219/700 L - RAL	DAMPY B 219/700 LI
Rod height	490 mm	490 mm	490 mm	700 mm	700 mm	700 mm
Rod treatment	AISI 304 stainless steel	Special RAL cathoporesis coating and paint	AISI 304 stainless steel	RAL 7015 cataphoresis coating and paint	Special RAL cathoporesis coating and paint	AISI 304 stainless steel
Rod thickness	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm
Rod diameter	219 mm	219 mm	219 mm	219 mm	219 mm	219 mm
Rod movement	Internal gas spring	Internal gas spring	Internal gas spring	Internal gas spring	Internal gas spring	Internal gas spring
Impact resistance	15000 J	15000 J	15000 J	15000 J	15000 J	15000 J
Break-in proof	150000 J	150000 J	150000 J	150000 J	150000 J	150000 J
Rod locking	With triangle key	With triangle key	With triangle key	With triangle key	With triangle key	With triangle key



Code	Name	Description
P970085 00001	DAMPY B 219/500 L	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 490 mm. Impact resistance 15000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. Cap with lights.
P970085 00101	DAMPY B 219/500 L - RAL	Semi-automated bollard with gas spring, shaft diameter 219 mm and height 490 mm. Impact resistance 15000 J. Painted stainless steel version, RAL 7015, with LED lights in cap. Foundation box included. RAL colour as requested.
P970085 00002	DAMPY B 219/500 LI	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 490 mm. Impact resistance 15000 J. Stainless steel version with LED light cap. Foundation box included. Cap with lights. Stainless steel version.
P970087 00001	DAMPY B 219/700 L	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 700 mm. Impact resistance 15000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. Cap with lights.
P970087 00101	DAMPY B 219/700 L - RAL	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 700 mm. Impact resistance 15000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. RAL colour as requested. Cap with lights.
P970087 00002	DAMPY B 219/700 LI	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 700 mm. Impact resistance 15000 J. Stainless steel version with LED light cap. Foundation box included. Cap with lights. Stainless steel version.

RECOMMENDED ACCESSORIES

	P800104 - ALLU					
	Power supply for fixed Ranch E bollards					