




Be ahead



SUB

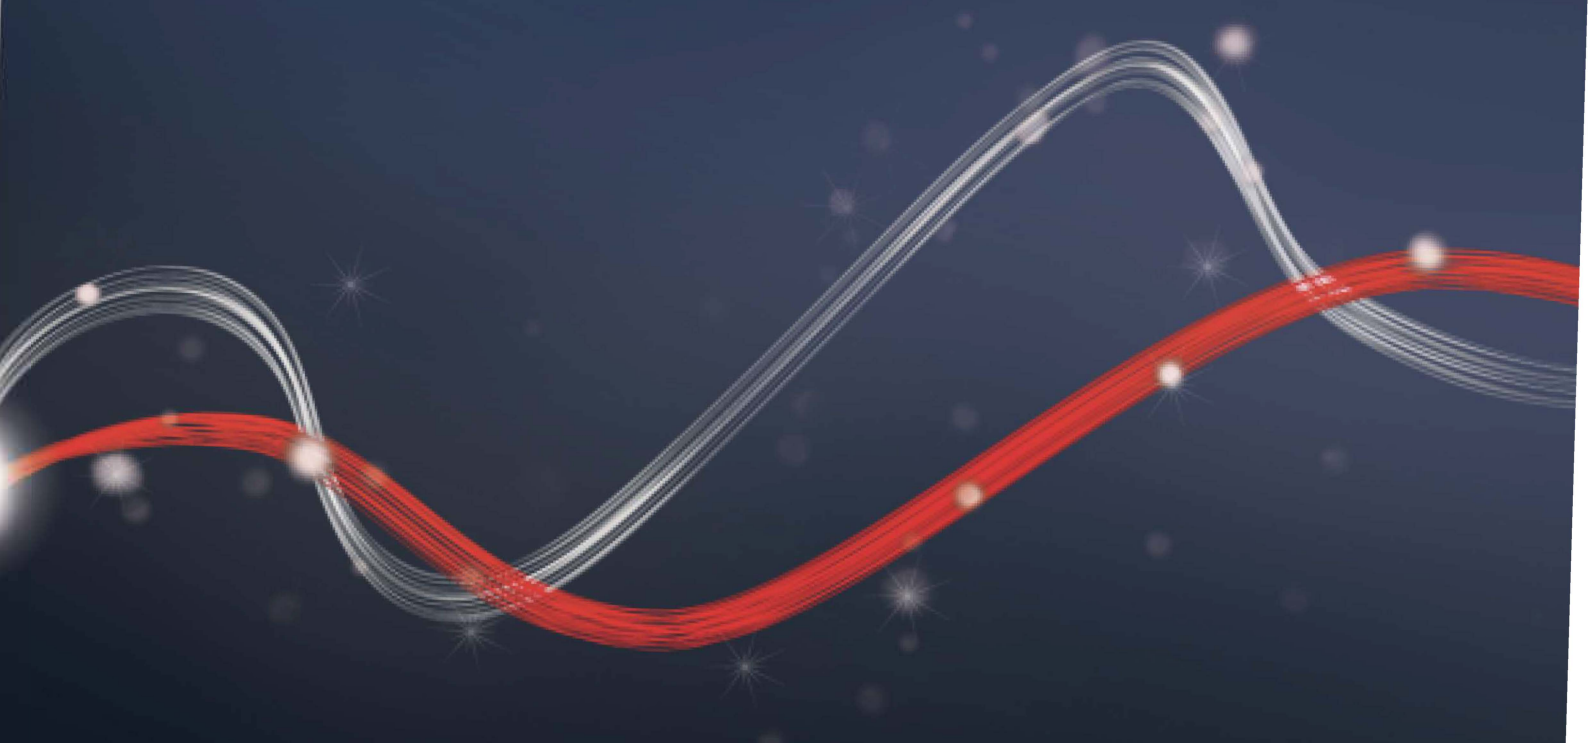




SUB



Hydraulic automation systems for swing gates

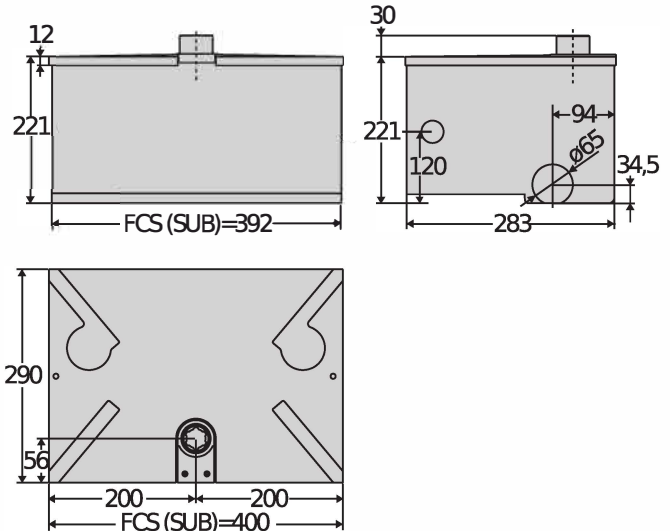

Complete range of underground hydraulic operators for very intensive use, suitable for any type of residential, industrial or multi-residence application.
 Compact and sturdy, capable of automating swing gate leaves up to 3.5 metres wide and weighing up to 800 kg.
 Available in reversible and non-reversible versions, with or without slowdown during opening and closing and with opening angles up to 180°.

Relevant features



The monoblock structure gives the possibility of a very neat installation that is extremely reliable over time.



The closing slowdown guarantees silent, smooth movements on even the biggest gates. Also, the adjustment screw makes it possible to adapt the slowdown intensity to needs of each situation.



Control unit with programming display and new, simplified scenario-based programming




SUB



Hydraulic automation systems for swing gates

SUB

Code	CI	Name	Description
P930026 00001	2600858	SUB DX	In-ground 230 V hydraulic operator Triangle key for hinged leaves up to 1,8 m. Manoeuvre time 24 s. Right operator. very intensive
P930026 00002	2600859	SUB SX	In-ground 230 V hydraulic operator Triangle key for hinged leaves up to 1,8 m. Manoeuvre time 24 s. Left operator. very intensive
P930012 00005	2601416	SUB R DX	In-ground 230 V irreversible hydraulic operator for swing gates up to 1,8 m with slowdown. Maneuver time 14+slowdown s. Right operator. Slowdown
P930012 00006	2611674	SUB R SX	In-ground 230 V irreversible hydraulic operator for swing gates up to 1,8 m with slowdown. Maneuver time 14+slowdown s. Left operator. Slowdown
P930012 00007	2611675	SUB R UL/CSA DX	In-ground 120 V irreversible hydraulic operator for swing gates up to 3,5 m with slowdown. Maneuver time 14+slowdown s. Right operator. Slowdown
P930012 00009	2611677	SUB R WINTER DX	In-ground 230 V irreversible hydraulic operator for swing gates up to 1,8 m with slowdown. Maneuver time 14+slowdown s. Right operator. Extremely low temperatures
P930012 00010	2611678	SUB R WINTER SX	In-ground 230 V irreversible hydraulic operator for swing gates up to 1,8 m with slowdown. Maneuver time 14+slowdown s. Left operator. Extremely low temperatures
P930009 00004	2601480	SUB E DX	In-ground 230 V hydraulic operator Reversible for hinged leaves up to 2,5 m. Manoeuvre time 24 s. Right operator. very intensive
P930009 00005	2611668	SUB E SX	In-ground 230 V hydraulic operator Reversible for hinged leaves up to 2,5 m. Manoeuvre time 24 s. Right operator. very intensive
P930013 00007	2600975	SUB ER DX	Reversible underground 230 V hydraulic operator for swing gates up to 2,5 m with soft closing. Operation time 14+slowdown s. Right-hand operator. Slowdown
P930013 00008	2600974	SUB ER SX	Reversible underground 230 V hydraulic operator for swing gates up to 2,5 m with soft closing. Operation time 14+slowdown s. Left-hand operator. Slowdown
P930014 00005	2611681	SUB EL DX	In-ground 230 V hydraulic operator Reversible for hinged leaves up to 3,5 m. Manoeuvre time 33 s. Right operator. very intensive
P930014 00006	2600973	SUB EL SX	In-ground 230 V hydraulic operator Reversible for hinged leaves up to 3,5 m. Manoeuvre time 33 s. Left operator. very intensive
P930010 00005	2601300	SUB G DX	In-ground 230 V hydraulic operator Triangle key for hinged leaves up to 1,8 m. Manoeuvre time 33 s. Right operator. very intensive
P930010 00006	2600026	SUB G SX	In-ground 230 V hydraulic operator Triangle key for hinged leaves up to 1,8 m. Manoeuvre time 33 s. Right operator. very intensive
P930010 00007	2611671	SUB G UL/CSA DX	In-ground 120 V hydraulic operator Non reversing for hinged leaves up to 3,5 m. Manoeuvre time 33 s. Right operator. very intensive
P930011 00005	2601256	SUB EG DX	In-ground 230 V hydraulic operator Reversible for hinged leaves up to 1,8 m. Manoeuvre time 24 s. Right operator. very intensive
P930011 00006	2601257	SUB EG SX	In-ground 230 V hydraulic operator Reversible for hinged leaves up to 1,8 m. Manoeuvre time 24 s. Right operator. very intensive

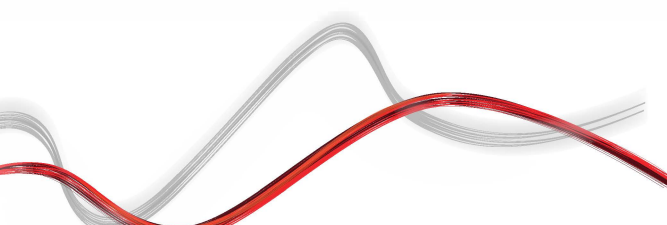



Hydraulic automation systems for swing gates

RIGEL 6 220-230V 50/60HZ: Universal control panel with display for one or two 230V - 650+650W operators



Cp D118333 00002 - Cj 2600589 - RIGEL 6 220-230V 50/60HZ - Recommended



- Universal control panel with display for one or two 230V - 650+650W operators
- Application: universal control panel for one or two operators
- Card power supply: 230 V single-phase
- Operators power supply: 230V single-phase
- Main features: removable terminal blocks, programming and diagnostics with display, built-in four-channel receiver, electro lock, electronic torque limiter, electronic deceleration at opening and closing, a separate limit switch inputs for each motor, traffic light management, preheating hydraulic operators, weekly timer, possibility to delete a specific remote control, customization of the 4 radio channels, personalization of the duration of the delayed output, adjustable sensitivity to the obstacle.
- Main functions: automatic re-closing, separate motor working times, stays locked when closed, water hammer, 2/3/4 step logic, partial opening, fast closing, separate opening and closing
- Compatibility: RIGEL 5 - RIGEL 4 - RIGEL 3 - RIGEL N

	SUB DX	SUB SX	SUB R DX	SUB R SX	SUB R UL/CSA DX	SUB R WINTER DX
Control unit	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6
Board power supply	230 V	230 V	230 V	230 V	230 V	230 V
Motor voltage	230 V	230 V	230 V	230 V	120 V	230 V
Power consumption	250 W	250 W	250 W	250 W	250 W	250 W
Max. width of door/gate wing	1,8 m	1,8 m	1,8 m	1,8 m	3,5 m	1,8 m
Max. weight of door/gate wing	800 kg	800 kg	800 kg	800 kg	800 kg	800 kg
Maximum angle	130 °	130 °	130 °	130 °	130 °	130 °
Cycle time	24 s	24 s	14+slowdown s	14+slowdown s	14+slowdown s	14+slowdown s
Type of limit switch	work time	work time	work time	work time	work time	work time
Slowdown	no	no	Yes	Yes	Yes	Yes
Locking	Open/close hydraulics	Open/close hydraulics	Open/close hydraulics	Open/close hydraulics	Open/close hydraulics	Open/close hydraulics
Release	Triangle key	Triangle key	Triangle key	Triangle key	Non reversing	Non reversing
Impact reaction	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch
Frequency of use	very intensive	very intensive	very intensive	very intensive	very intensive	very intensive
Protection rating	IP67	IP67	IP67	IP67	IP67	IP67
Environmental conditions	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-30 ÷ 60 °C

	SUB R WINTER SX	SUB E DX	SUB E SX	SUB ER DX	SUB ER SX	SUB EL DX
Control unit	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6
Board power supply	230 V	230 V	230 V	230 V	230 V	230 V
Motor voltage	230 V	230 V	230 V	230 V	230 V	230 V
Power consumption	250 W	250 W	250 W	250 W	250 W	250 W
Max. width of door/gate wing	1,8 m	2,5 m	2,5 m	2,5 m	2,5 m	3,5 m
Max. weight of door/gate wing	800 kg	800 kg	800 kg	800 kg	800 kg	800 kg
Maximum angle	130 °	130 °	130 °	130 °	130 °	130 °
Cycle time	14+slowdown s	24 s	24 s	14+slowdown s	14+slowdown s	33 s
Type of limit switch	work time	work time	work time	work time	work time	work time
Slowdown	Yes	no	no	Yes	Yes	no
Locking	Open/close hydraulics	Open/close hydraulics	Open/close hydraulics	Solenoid Lock	Solenoid Lock	Solenoid Lock
Release	Non reversing	Reversible	Reversible	Reversible	Reversible	Reversible
Impact reaction	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch
Frequency of use	very intensive	very intensive	very intensive	very intensive	very intensive	very intensive
Protection rating	IP67	IP67	IP67	IP67	IP67	IP67



SUB



Hydraulic automation systems for swing gates

	SUB R WINTER SX	SUB E DX	SUB E SX	SUB ER DX	SUB ER SX	SUB EL DX
Environmental conditions	-30 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C
	SUB EL SX	SUB G DX	SUB G SX	SUB G UL/CSA DX	SUB EG DX	SUB EG SX
Control unit	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6	RIGEL 6
Board power supply	230 V	230 V	230 V	230 V	230 V	230 V
Motor voltage	230 V	230 V	230 V	120 V	230 V	230 V
Power consumption	250 W	250 W	250 W	250 W	250 W	250 W
Max. width of door/gate wing	3,5 m	1,8 m	1,8 m	3,5 m	1,8 m	1,8 m
Max. weight of door/gate wing	800 kg	800 kg	800 kg	800 kg	800 kg	800 kg
Maximum angle	130 °	180 °	180 °	180 °	130 °	130 °
Cycle time	33 s	33 s	33 s	33 s	24 s	24 s
Type of limit switch	work time	work time	work time	work time	work time	work time
Slowdown	no	no	no	no	no	no
Locking	Solenoid Lock	Open/close hydraulics	Open/close hydraulics	Open/close hydraulics	Open/close hydraulics	Open/close hydraulics
Release	Reversible	Triangle key	Triangle key	Non reversing	Reversible	Reversible
Impact reaction	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch	Hydraulic clutch
Frequency of use	very intensive	very intensive	very intensive	very intensive	very intensive	very intensive
Protection rating	IP67	IP67	IP67	IP67	IP67	IP67
Environmental conditions	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C	-10 ÷ 60 °C

VITAL ACCESSORIES

	Cp D114092 00002 - Ci 2601365 ALCOR AC A Control unit with on-board receiver - no display - Standard terminal block		Cp D113680 00002 - Ci 2600108 ALPHA SD Universal control panel with potentiometers for one 230V/500W single-phase operator
	Cp N733066 00003 - Ci 2600784 FCS DX Foundation box designed for fitting the SUB right-hand operator, allowing easy maintenance without ever having to disassemble the gate leaf		Cp N733066 00004 - Ci 2600785 FCS SX Foundation box designed for fitting the SUB left-hand operator, allowing easy maintenance without ever having to disassemble the gate leaf
	Cp N733066 00001 - Ci 2610894 CPS DX Foundation box designed for fitting the SUB right-hand operator		Cp N733066 00002 - Ci 2610895 CPS SX Foundation box designed for fitting the SUB left-hand operator
	Cp N733092 - Ci 2600370 CPS G Weight-bearing foundation box for preparation for assembly of SUB G right and left operator		

RECOMMENDED ACCESSORIES

	Cp D610256 - Ci 2600599 CLS/82 Triangular release key for SUB operators l=82 mm		Cp N728002 - Ci 2600776 BSC Arm for installation of SUB out of the gate axis
--	--	---	---



Hydraulic automation systems for swing gates

RECOMMENDED ACCESSORIES

	<p>Cp D111013 - Ci 2607261 ME</p> <p>Control board for 12Vac solenoid lock for 230V automation systems</p>		<p>Cp P111782 - Ci 2601411 COMPACTA A20-180</p> <p>Pair of photocells adjustable 180° horizontally. 20 metre range. 12-33 VAC/15-35 VDC power supply.</p>
	<p>Cp D114094 00002 - Ci 2607540 RADIUS LED AC A R0</p> <p>Flashing light without incorporated antenna for motors with 230 V power supply.</p>		<p>Cp D114093 00002 - Ci 2607538 RADIUS LED AC A R1</p> <p>Flashing light with incorporated antenna for motors with 230 V power supply.</p>
	<p>new Cp P123032 00001 - Ci 2613516 EBP AC A 230V 50/60HZ</p> <p>230V vertical electric lock.</p>		<p>new Cp P123032 00002 - Ci 2613517 EBP AC A 120V 50/60Hz</p> <p>120V vertical electric lock.</p>





SUB



Hydraulic automation systems for swing gates


EasyAXS

EASY CONNECT. EASY ACCESS.



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.

1



2

EASY TO CONNECT



PLUG&PLAY
CONNECTIVITY MODULE
FOR QUICKLY CONNECTING
BFT SOLUTIONS



EASY TO SET UP



CONFIGURATION
AND
MANAGEMENT OF
THE MOTOR WITH
THE **EasyAXS app**

3

EASY TO CONTROL



TaHoma app
TO PROVIDE CUSTOMERS
WITH A SMART SOLUTION
FOR ACCESSING THEIR
HOMES





SUB



Hydraulic automation systems for swing gates

EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

WIFI MODULE + ANTENNA



→ 20/25 metres

MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





Hydraulic automation systems for swing gates




U-LINK 2.0

AN UPDATED VERSION OF **U-LINK** TO GIVE YOU EVEN MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Hydraulic automation systems for swing gates

U-SECURITY

A NEW AND EVEN MORE SECURE RADIO PROTOCOL



→ **Secure**
By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



→ **Easy**
Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app



→ **Universal**
The radio protocol is also compatible with the previous generation of receivers

