

KHLKIT – LIBRA UL R INSTALLATION HOMELINK COMPATIBLE RECEIVER / TRANSMITTER KIT

0

- 1. Connect the red receiver lead to terminal 11 on the Libra board.
- 2. Connect the black receiver lead to terminal 12 on the Libra board.
- 3. Connect the blue receiver lead to terminal 15 on the Libra board.
- 4. Connect the yellow receiver lead to terminal 16 on the Libra board.

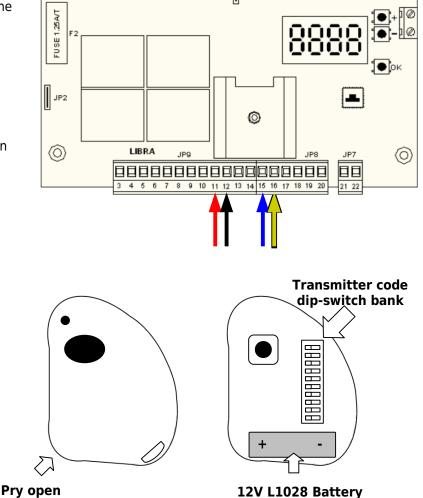



Harness wire color legend:

Red & Black: Power supply, 12 to 24 V AC or DC Blue & Yellow: Channel 1 normally open output Green & Orange: Channel 2 normally open output

TRANSMITTER INDIVIDUALIZATION:

- •Open up the transmitter by prying on corner as illustrated.
- •Change the transmitter code by moving the switches on the dip-switch bank.
- •Carefully close transmitter by snapping enclosure back in place.

TRANSMITTER PROGRAMMING:

•Press and hold the receiver channel button until LED lights on (P1 for channel 1; P2 for channel 2).

here

•Press button on transmitter to be programmed.

RECEIVER MEMORY DELETION:

- •Press and hold P1.
- •WITHOUT RELEASING **P1**, when the LED lights up, press and hold **P2** for 10 seconds.
- •Release both buttons. LED will flash 6 times indicating memory deletion.

