




Be ahead



DAMPY B

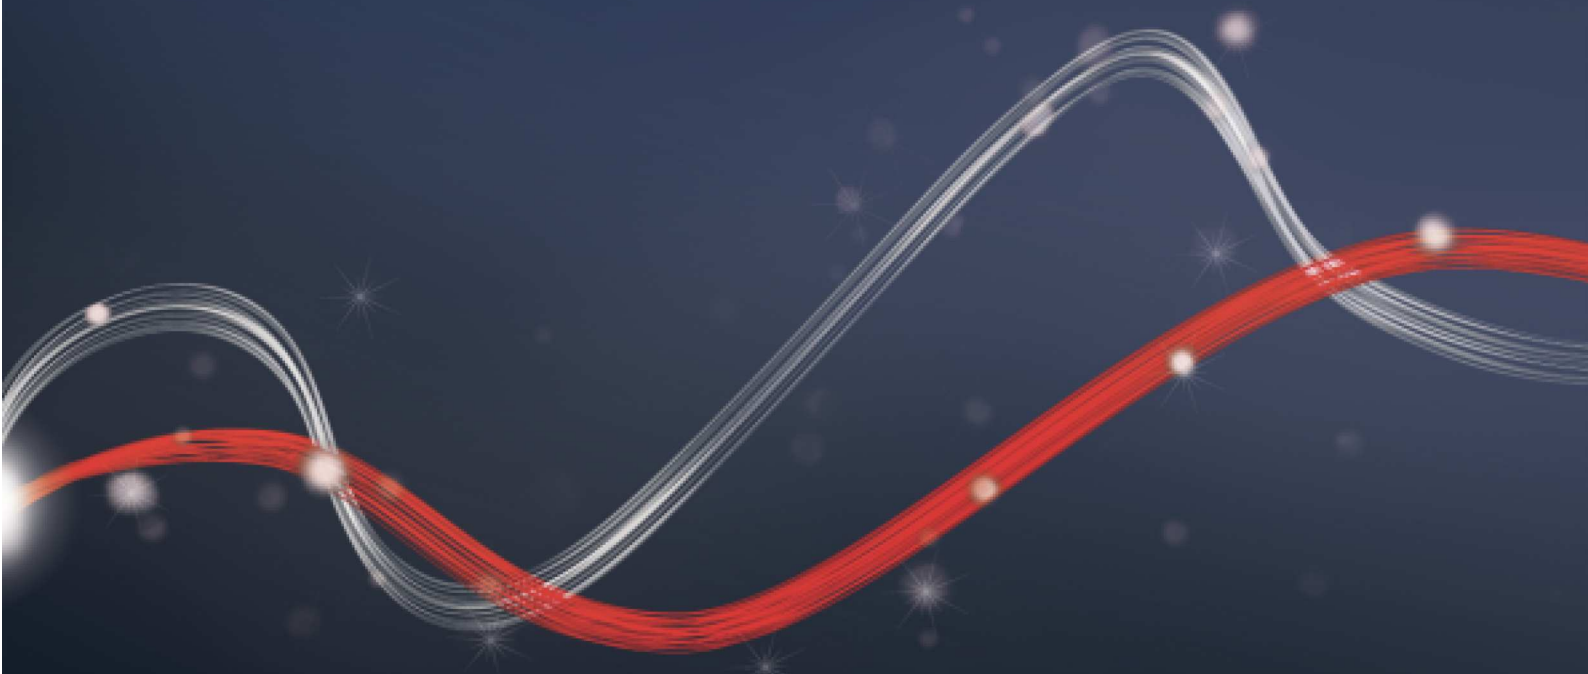




DAMPY B



Parking and traffic bollards

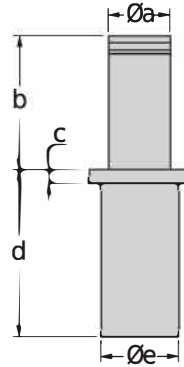

	a	b	c	d	e
DAMPY B 115-500 / DAMPY B 115-500 INOX	115	500	25	593	168
DAMPY B 210-500 / DAMPY B 219-500 INOX	210	500	45	756	273
DAMPY B 210-700 / DAMPY B 219-700 INOX	210	700	45	1016	273

Semi-automatic bollard driven by gas spring for controlling road access points. Competitive and easy to use. Also available with stainless steel shaft and light cap.



DAMPY B



Parking and traffic bollards


DAMPY B

Code	Name	Description
P970085 00001	DAMPY B 219/500 L	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 490 mm. Impact resistance 15000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. Cap with lights.
P970085 00101	DAMPY B 219/500 L - RAL	Semi-automated bollard with gas spring, shaft diameter 219 mm and height 490 mm. Impact resistance 15000 J. Painted stainless steel version, RAL 7015, with LED lights in cap. Foundation box included. RAL colour as requested.
P970085 00002	DAMPY B 219/500 LI	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 490 mm. Impact resistance 15000 J. Stainless steel version with LED light cap. Foundation box included. Cap with lights. 304 stainless steel version.
P970087 00001	DAMPY B 219/700 L	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 700 mm. Impact resistance 15000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. Cap with lights.
P970087 00101	DAMPY B 219/700 L - RAL	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 700 mm. Impact resistance 15000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. RAL colour as requested. Cap with lights.
P970087 00002	DAMPY B 219/700 LI	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 700 mm. Impact resistance 15000 J. Stainless steel version with LED light cap. Foundation box included. Cap with lights. 304 stainless steel version.

	DAMPY B 219/500 L	DAMPY B 219/500 L - RAL	DAMPY B 219/500 LI
Rod height	490 mm	490 mm	490 mm
Rod treatment	RAL 7015 cataphoresis coating and paint	Special RAL cataphoresis coating and paint	AISI 304 stainless steel
Rod thickness	5 mm	5 mm	5 mm
Rod diameter	219 mm	219 mm	219 mm
Rod movement	Internal gas spring	Internal gas spring	Internal gas spring
Impact resistance	15000 J	15000 J	15000 J
Break-in proof	150000 J	150000 J	150000 J
Rod locking	With triangle key	With triangle key	With triangle key

	DAMPY B 219/700 L	DAMPY B 219/700 L - RAL	DAMPY B 219/700 LI
Rod height	700 mm	700 mm	700 mm
Rod treatment	RAL 7015 cataphoresis coating and paint	Special RAL cataphoresis coating and paint	AISI 304 stainless steel
Rod thickness	5 mm	5 mm	5 mm
Rod diameter	219 mm	219 mm	219 mm
Rod movement	Internal gas spring	Internal gas spring	Internal gas spring
Impact resistance	15000 J	15000 J	15000 J
Break-in proof	150000 J	150000 J	150000 J
Rod locking	With triangle key	With triangle key	With triangle key

RECOMMENDED ACCESSORIES

	P800104 - ALLU			
	Power supply for fixed Ranch E bollards			



Parking and traffic bollards

What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems. In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

It is intuitive

Easy to install and to use

It is scalable

You can add as many devices as you want

It is flexible

It allows you to create groups of interconnected products

It is practical

Works with or without an internet connection

It is functional

Its settings can be controlled remotely using dedicated applications



Parking and traffic bollards

Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.




U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.



U-Base 2

A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.



U-SDK

U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.



Clonix U-Link

Connect non-native U-Link and non-BFT products to U-Link systems.


Is it possible to connect non-native U-Link BFT operators or other brands of products to U-Link? Yes, thanks to the Clonix receivers. Accessories which accept no limits.



B-EBA

A direct link to your operators.

The B-EBA expansion cards make it possible to connect external devices such as PCs, smartphones and tablets to a BFT operator and a Clonix receiver or to connect multiple BFT products in a U-Link network. These accessories integrate with U-Link technology and with Bluetooth, Wifi, Z-Wave and TCP/IP protocols as well as with the RS485 serial interface. A device that demonstrates exactly what BFT means by interconnectivity.

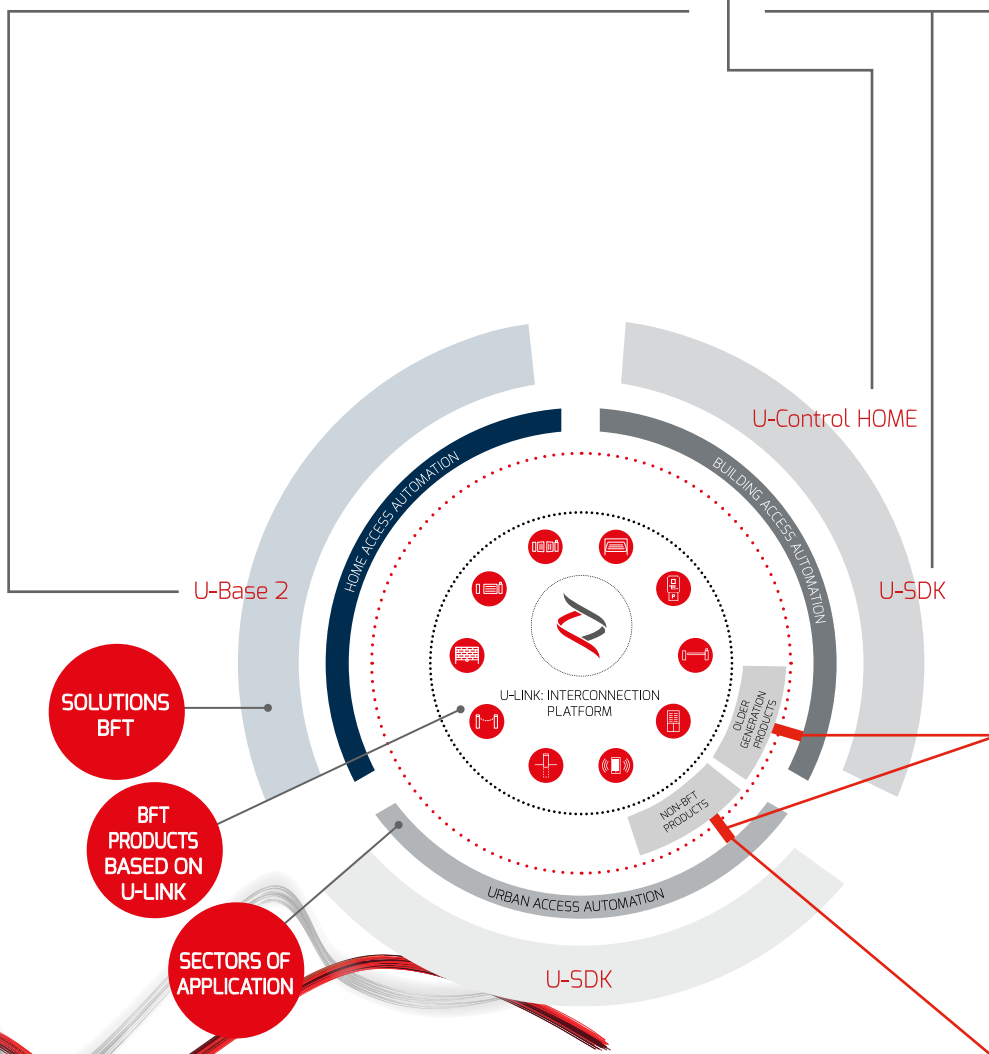

SOLUTIONS BFT

BFT PRODUCTS BASED ON U-LINK

SECTORS OF APPLICATION



www.BFTGateOpeners.com | (800) 878-7829 | Sales@BFTGateOpeners.com

INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.