

JOINT

RANGE

Electromechanical operator for column mounted swing gates up to 550Lbs/10 Feet

JOINT UL/CSA

P935041 00003
120 Volt VAC



SMART TECNOLOGY

The large anti-shearing arms allow installation on columns with angles up to 125°.

SAFE USE

Quick and easy manual release.

- Adjustable limit switches.
- Maximum recommended offset 18"



TECHNICAL FEATURES

Control panels	ARIES UL/CSA Rigel 5 no capacitors Rigel 4 no capacitors
Reversible/irreversible operator	irreversible
Power supply	120 V 60 Hz single-phase
Absorbed power	0.4 hp (300 W)
Thermal protection	integrated
Opening and closing time	15 s
Impact reaction	torque limiter integrated in the control panel
Lock	mechanical opening/closing
Manual release	lockable door and release knob
Operating cycle	intensive use
Environmental conditions	from 5°F (-15°C) to 140°F (60°C)
Degree of protection	IP44
Operator weight	35 lbs (~16 kg)
Leaf weight	up to 550 lbs (250 kg)
Leaf length:	up to 10' (3 m)




tuned to you

www.BFTGateOpeners.com | (800) 878-7829

JOINT

DIMENSIONS

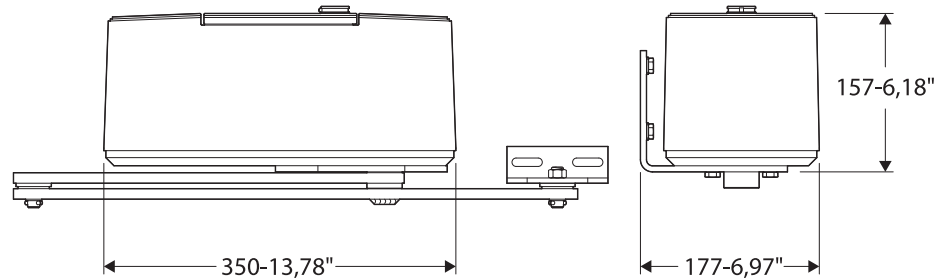

ACCESSORIES



D113198 00001
ARIES UL/CSA



D113693 00001
RIGEL 5 120 V
NO CAPACITORS



KD113236 00003
RIGEL 4 120V (NO
CAPACITORS)



N574005 - SIBOX
Empty safe for external
release and control push-
button panel.
Dimensions: 7"x5"x3' 1/2."



**N999177 - PARTS
KIT**
Kit for Joint/Igea arms



P121024 - Q-BOX
Digital keypad with
10 channels and 100
combinations. Backlit



KD113693 00001
RIGEL 5 NO
CAPACITORS
Rigel 5 115 vac with built
in 433 receiver



KERIG5C040U
RIGEL 5 LE 12X14
NO CAPACITORS
12" x14" large fiberglass
enclosure. Pre-wired with
Rigel5



KERIG4C040U
RIGEL 4 LE 12x14
NO CAPACITORS
12" x14" large fiberglass
enclosure. Pre-wired with
Rigel4



D111904 Mitto 2
Transmitter:
12V Two channel 433Mhz
rolling code remote control



tuned to you

www.BFTGateOpeners.com | (800) 878-7829